


EVALUATION OF IMPROVEMENT CAUSED BY THE RESILIENT UNDERLAYMENT

BRAND AND THICKNESS

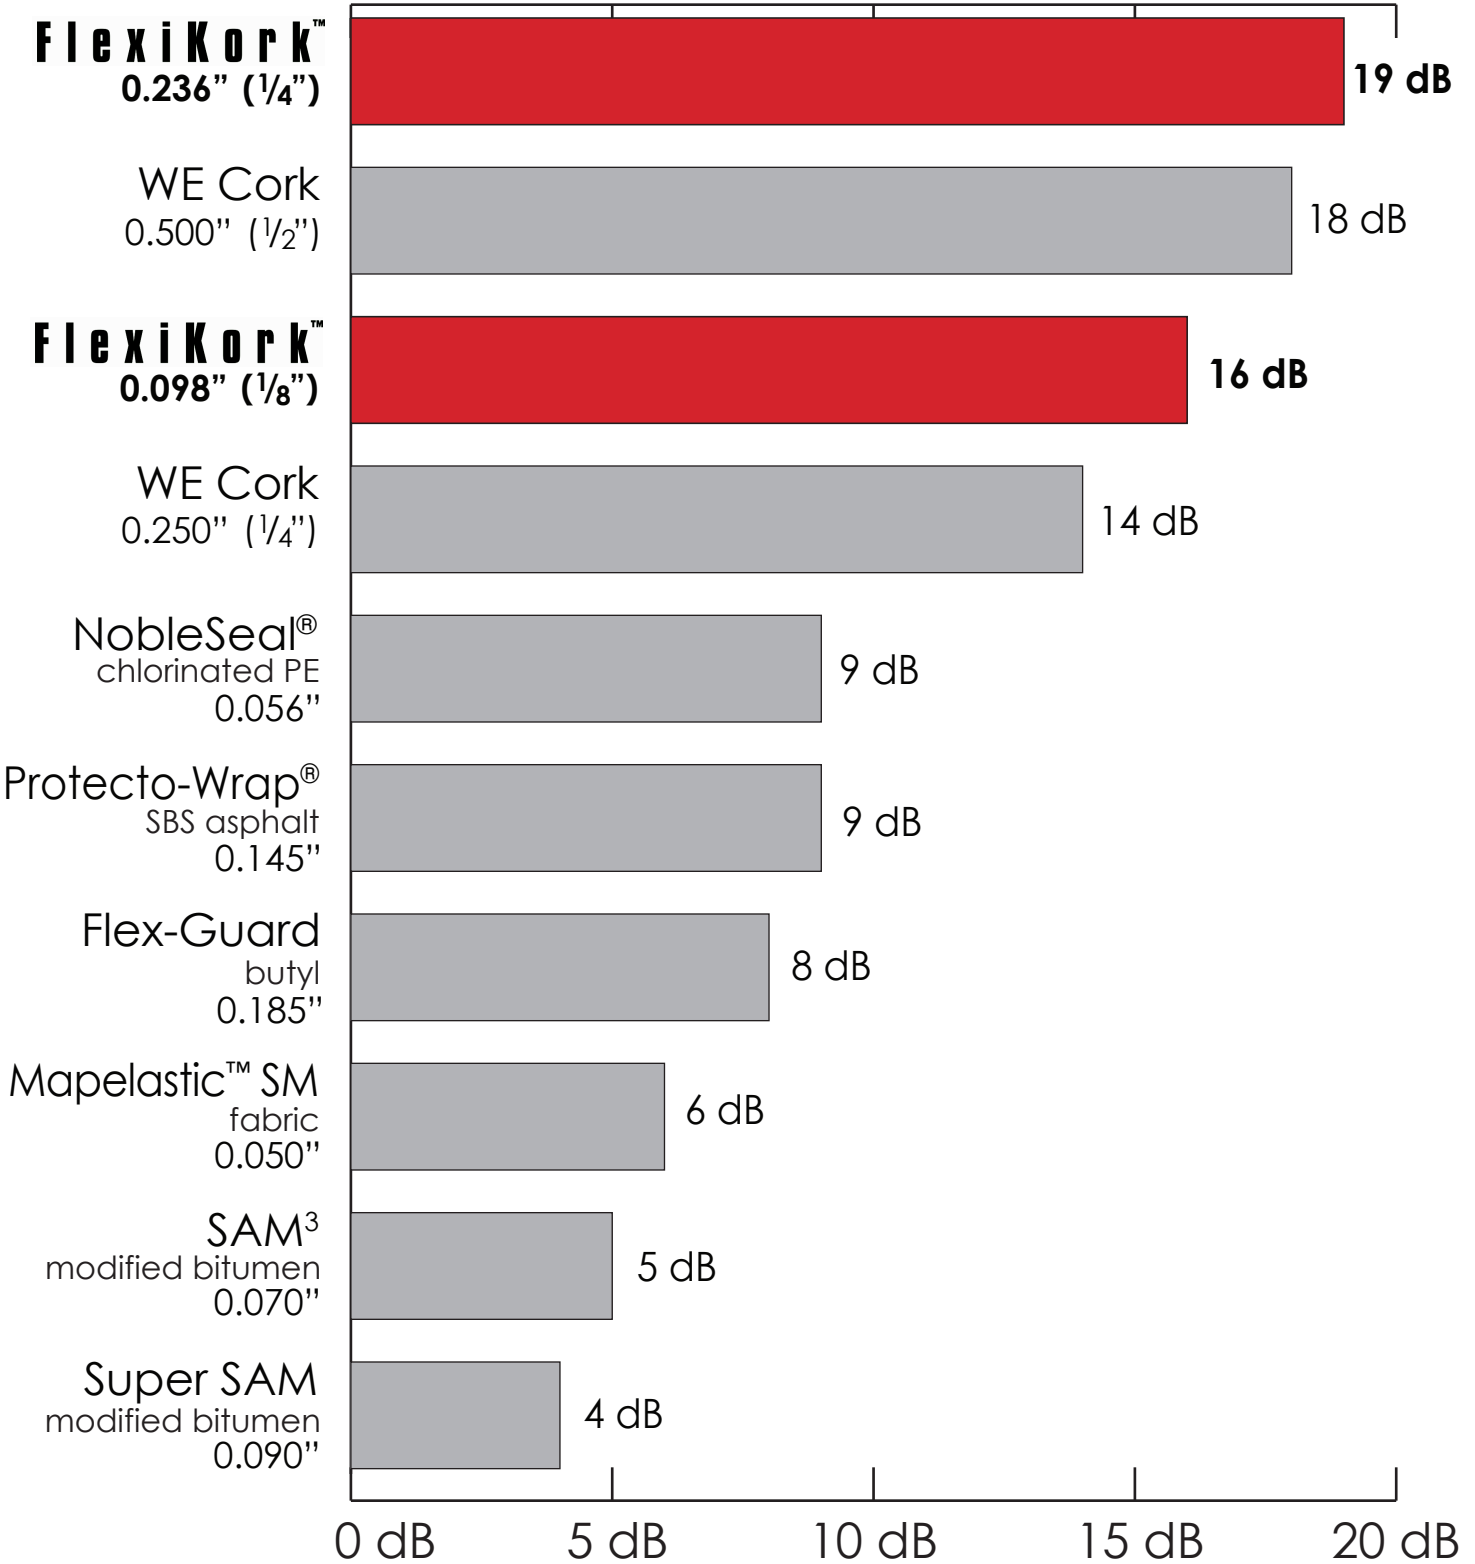

TESTED TO ASTM E2179 • TESTED WITH TILE FLOOR COVERING